

# 1-663-1S



## FEATURES


- // Capable of 4482 N clamp force
- // One-piece nodular iron housing
- // Ideal for mount on driveline or in the wheel
- // Square seal piston retraction for constant running clearance
- // Supplied with mount bolts and sealed and lubricated slider pins
- // Variety of inlet and bleeder options for mounting flexibility
- // Quick change pads

## SPECIFICATIONS

WEIGHT	8,16 kg
ROTOR DIAMETER	254 mm - 508 mm
ROTOR THICKNESS	12,7mm to 25,4 mm
LINING TYPE	Non-Asbestos Organic, Sintered, Semi-Metallic
TOTAL LINING AREA	93,44 Sq. cm
USABLE LINING THICKNESS PER PAD	8,33 mm
PISTON DIAMETER	66,04 mm
MAX PRESSURE	137,90 bar
FLUID DISPLACEMENT	0,33 Cu. cm
FLUID TYPE	Brake Fluid, Hydraulic Oil
FLUID INLET	12:00, 3:00, 9:00
BLEEDER	12:00, 3:00, 9:00

Specifications are guidelines only and subject to change. Consult Hayes Performance Systems for specific model, part number, and assembly drawings - contact@hbpsi.com.

## TORQUE INFORMATION

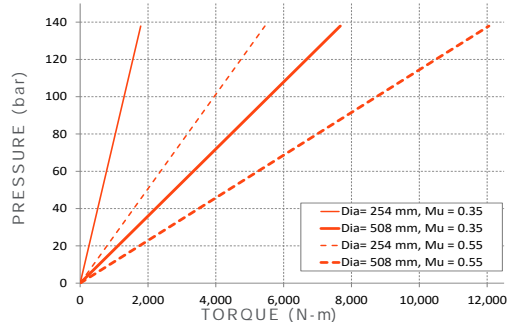

## REFERENCE DIMENSIONS

